

Stefanie Hering x Studio M – Lighting Collection Overview

July 2026





01
Ray Dance



02
Stream



03
Burgeon



04
Tropo

TABLE OF CONTENTS

04	01 Ray Dance	35	Cascade Cluster 7
06	Setup	36	Material/Finish
07	Chandelier 3		
08	Chandelier 5	37	03 Burgeon
09	Nexus	39	Setup
10	Nexus Wall	41	Portable
13	Single Pendant Olive	42	Material/Finish
14	Single Pendant Globe	45	Single Pendant
15	Single Pendant Lampion	46	Pendant Cluster 3
16	Pendant Cluster 3	47	Pendant Cluster 5
17	Pendant Cluster 5	48	Pendant Cluster 7
18	Pendant Cluster 7	49	Material/Finish
19	Wall Olive	52	Wall
20	Wall Globe		
		53	04 Tropo
21	02 Stream	55	Setup
23	Setup	57	Chandelier 5
25	Single Pendants S	58	Chandelier 7
26	Single Pendants M	59	Material/Finish
27	Single Pendants L	60	Wall
29	Pendant Cluster 3	61	Material/Finish
30	Pendant Cluster 5		
32	Cascade Cluster 1	62	Contact
33	Cascade Cluster 3		
34	Cascade Cluster 5		

01

Ray Dance


The Ray Dance family fills the space with a radiant interplay, reminiscent of sunlight playing on water. Mouth-blown glass bodies of olives, spheres, and lanterns, exude an opulence that occupies the room defines its atmosphere, and sets it in motion. The faceted glass shades provide captivating glimpses and reflections in Clear, Smoky Gray, and Rosé.

Available as chandeliers, pendants and wall lights, they immerse every room in sparkling light.




A


01

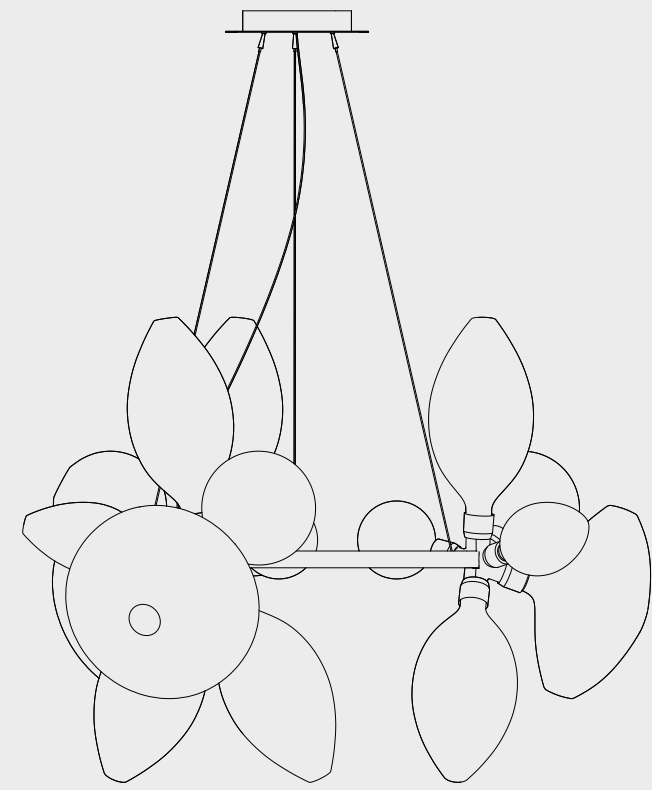


02

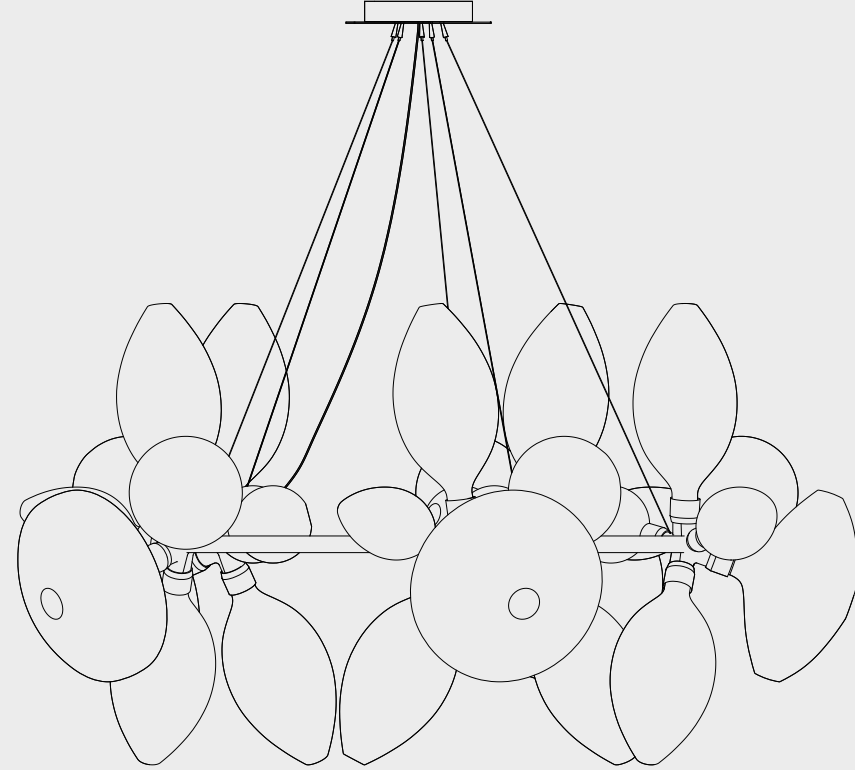**B**

03

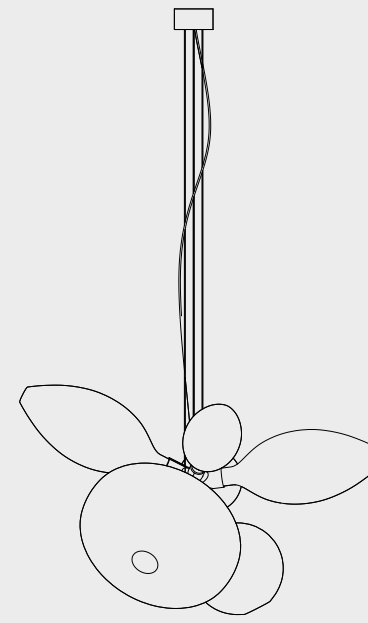

04

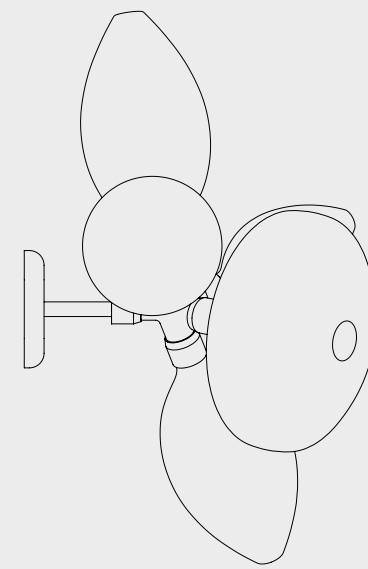**C**


05




06




07

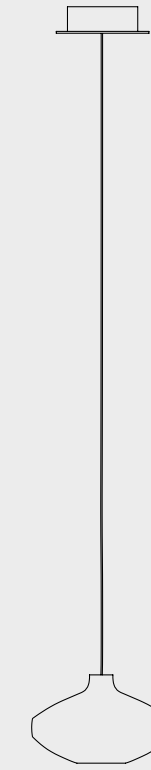**D**


08

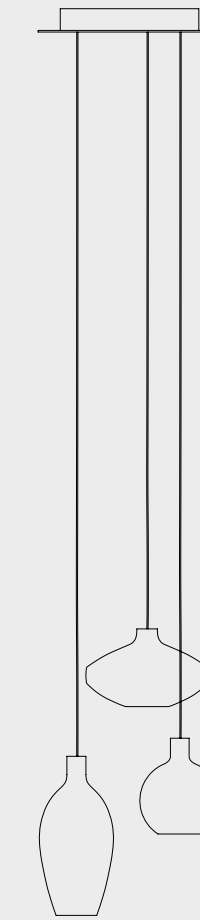


09

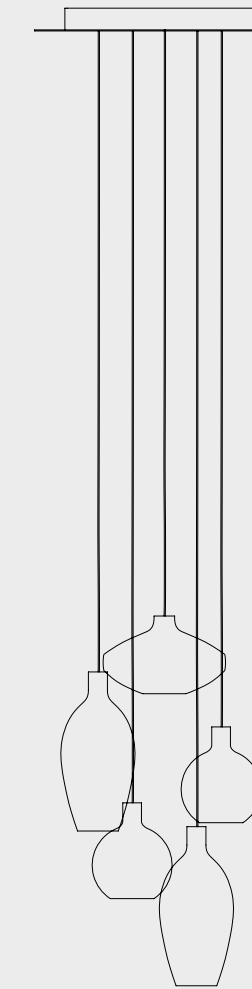


10

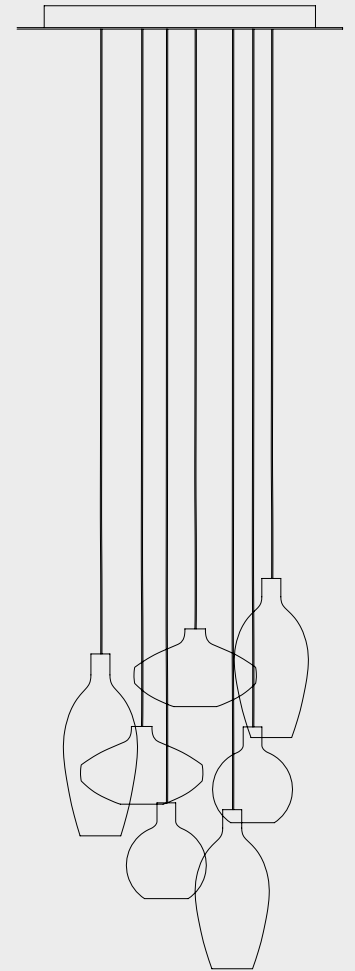**E**

11



12



Ray Dance – Setup

A CHANDELIERS

- 01 – Chandelier 3
- 02 – Chandelier 5

B NEXUS

- 03 – Nexus
- 04 – Nexus Wall

C SINGLE PENDANTS


- 05 – Olive
- 06 – Globe
- 07 – Lampion

D PENDANT CLUSTERS

- 08 – 3 Strings
- 09 – 5 Strings
- 10 – 7 Strings

E WALL

- 11 – Olive
- 12 – Globe

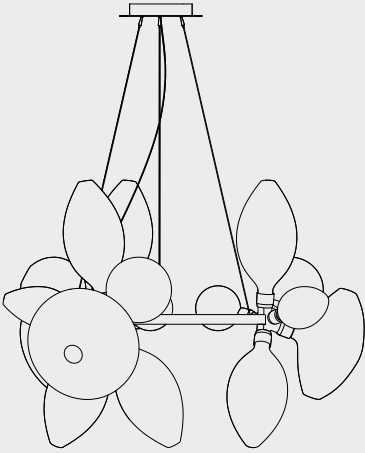

Ray Dance Chandelier 3

GENERAL

Product type	: LED pendant luminaire
Application	: Indoor
Mounting type	: Surface-mounted (ceiling)
Protection class	: Class II
IP rating	: IP20
Color / surface finish	: Powder Coated Black
Material	: Iron, aluminium, glass

ELECTRICAL

Rated voltage	: 220–240 Vac
Power consumption	: 45 W
Driver	: Included in canopy
Dimmable	: Yes
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)
Energy efficiency	: D

LIGHTING

Light source	: Integrated LED (replaceable)
Luminous flux	: 3300 lm
Luminous efficacy	: 73 lm/W
Colour temperature	: 3000 K
CRI	: 90
Beam angle	: 360°
Light distribution	: Diffuse
Lifetime	: L70/B50 @ 50,000 h

MECHANICAL

Dimensions (Ø × H)	: Ø1130 × 790 mm
Weight	: 33.6 kg
Adjustability	: Height adjustable

STANDARDS

Certifications	: CE, RoHS
----------------	------------

Glass Colors Available:


- Clear
- Smoky Gray
- Rosé



Clear/Smoky Gray Mix



Clear/Smoky Gray/Rosé Mix

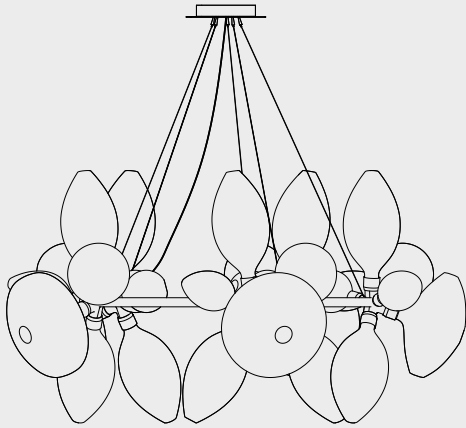

Ray Dance Chandelier 5

GENERAL

Product type	: LED pendant luminaire
Application	: Indoor
Mounting type	: Surface-mounted (ceiling)
Protection class	: Class II
IP rating	: IP20
Color / surface finish	: Powder Coated Black
Material	: Iron, aluminium, glass

ELECTRICAL

Rated voltage	: 220–240 Vac
Power consumption	: 75 W
Driver	: Included in canopy
Dimmable	: Yes
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)
Energy efficiency	: D

LIGHTING

Light source	: Integrated LED (replaceable)
Luminous flux	: 5400 lm
Luminous efficacy	: 72 lm/W
Color temperature	: 3000 K
CRI	: 90
Beam angle	: 360°
Light distribution	: Diffuse
Lifetime	: L70/B50 @ 50,000 h

MECHANICAL

Dimensions (Ø × H)	: Ø1420 × 790 mm
Weight	: 49.5 kg
Adjustability	: Height adjustable

STANDARDS

Certifications	: CE, RoHS
----------------	------------

Glass Colors Available:


- Clear
- Smoky Gray
- Rosé



Clear/Smoky Gray Mix



Clear/Smoky Gray/Rosé Mix

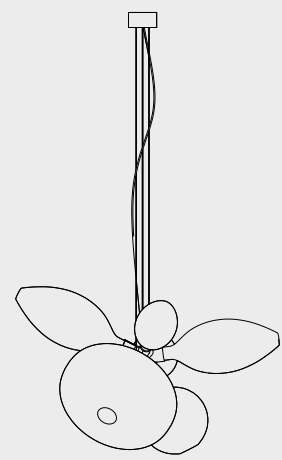

Ray Dance Nexus

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 1050 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 70 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated Black	Beam angle	: 360°
Material	: Iron, aluminium, glass	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (L × W × H)	: 725 × 530 × 490 mm
Power consumption	: 15 W	Weight	: 10.7 kg
Driver	: 220–240 Vac	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS


Glass Colors Available:

- Clear
- Smoky Gray
- Rosé

Clear/Smoky Gray Mix



Clear/Smoky Gray/Rosé Mix

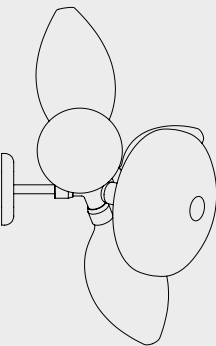

Ray Dance Nexus Wall

GENERAL		LIGHTING	
Product type	: LED wall luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 500 lm
Mounting type	: Surface-mounted (wall)	Luminous efficacy	: 91 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated Black	Beam angle	: 180°
Material	: Iron, aluminium, glass	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (L × W × H)	: 762 × 483 × 419 mm
Power consumption	: 5.5 W	Weight	: 10.5 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

Glass Colors Available:

- Clear
- Smoky Gray
- Rosé

Clear/Smoky Gray Mix



Clear/Smoky Gray/Rosé Mix

Ray Dance Pendants







Ray Dance Single Pendant Olive

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 500 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 91 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 15° (without glass shade)
Material	: Iron, aluminium, glass	Light distribution	: Direct
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (Ø × H)	: Ø140 × 300 mm
Power consumption	: 5.5 W	Weight	: 1.6 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

Glass Colors Available:

- Clear
- Smoky Gray
- Rosé



Clear

Rosé

Smoky Gray



Ray Dance Single Pendant Globe

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 500 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 91 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 15° (without glass shade)
Material	: Iron, aluminium, glass	Light distribution	: Direct
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (Ø × H)	: Ø190 × 215 mm
Power consumption	: 5.5 W	Weight	: 1.6 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

Glass Colors Available:

- Clear
- Smoky Gray
- Rosé





Ray Dance Single Pendant Lampion

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 500 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 91 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 15° (without glass shade)
Material	: Iron, aluminium, glass	Light distribution	: Direct
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (Ø × H)	: Ø240 × 160 mm
Power consumption	: 5.5 W	Weight	: 1.6 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

Glass Colors Available:


- Clear
- Smoky Gray
- Rosé



Clear

Rosé

Smoky Gray

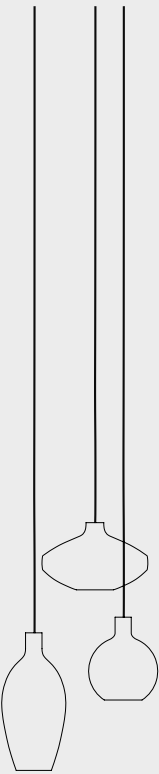

Glass Colors Available:


- Clear
- Smoky Gray
- Rosé

Ray Dance Pendant Cluster 3

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 2500 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 92 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 15° (without glass shade)
Material	: Iron, aluminium, glass	Light distribution	: Direct
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (Ø × H)	: Ø400 × 480 mm
Power consumption	: 27 W	Weight	: 5.25 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



Clear/Smoky Gray/Rosé Mix

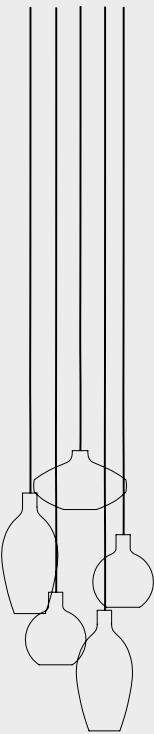

Ray Dance Pendant Cluster 5


GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 2500 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 92 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 15° (without glass shade)
Material	: Iron, aluminium, glass	Light distribution	: Direct
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (Ø × H)	: Ø520 × 530 mm
Power consumption	: 27 W	Weight	: 8.6 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

Glass Colors Available:

- Clear
- Smoky Gray
- Rosé



Clear

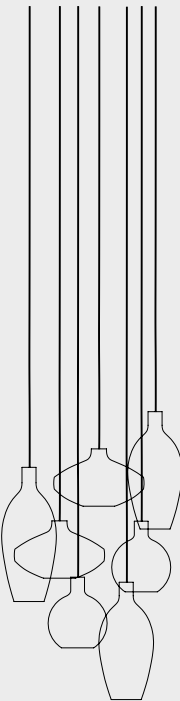

Glass Colors Available:


- Clear
- Smoky Gray
- Rosé

Ray Dance Pendant Cluster 7

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 3500 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 92 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 15° (without glass shade)
Material	: Iron, aluminium, glass	Light distribution	: Direct
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (Ø × H)	: Ø610 × 540 mm
Power consumption	: 37.8 W	Weight	: 12.4 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D		
		STANDARDS	
		Certifications	: CE, RoHS



Clear

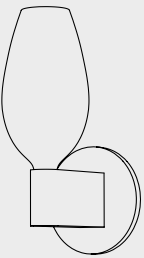

Glass Colors Available:

- Clear
- Smoky Gray
- Rosé

Ray Dance Wall Olive

GENERAL		LIGHTING	
Product type	: LED wall luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 180 lm
Mounting type	: Surface-mounted (wall)	Luminous efficacy	: 72 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Beam angle	: 180°
Material	: Iron, aluminium, glass	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (L × W × H)	: 152 x 152 x 318 mm
Power consumption	: 2.5 W	Weight	: 1.8 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS




Clear



Rosé



Smoky Gray



Glass Colors Available:

- Clear
- Smoky Gray
- Rosé

Ray Dance Wall Globe

GENERAL		LIGHTING	
Product type	: LED wall luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 180 lm
Mounting type	: Surface-mounted (wall)	Luminous efficacy	: 72 lm/W
Protection class	: Class II	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Beam angle	: 180°
Material	: Iron, aluminium, glass	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–240 Vac	Dimensions (L × W × H)	: 146 x 152 x 248 mm
Power consumption	: 2.5 W	Weight	: 1.8 kg
Driver	: Included in canopy	Adjustability	: Height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



Clear



Rosé



Smoky Gray

02

Stream

Stream is a pendant light system with bisque porcelain shades that emit a soft, warm glow. Designed by Stefanie Hering, this versatile and customizable lighting system combines precision with modern functionality.

A defining feature of Stream is the ability to suspend up to twelve vertically on a single cable.

This makes the system particularly suited for large-scale installations and dramatic vertical spaces such as stairwells and atriums.

Available in four different basic setups: single pendants, pendant clusters, and cascade clusters, they can be further modified by the number of cables, length, and the number of lampshades they hold.

The bisque porcelain shades are available in three sizes and can be customized with a wide range of finishes from Hering Berlin's portfolio—ideal for a bespoke lighting solution.



Stream

– Setup

A SINGLE PENDANTS **C** CASCADE CLUSTERS

- 01 – Pendant S
- 02 – Pendant M
- 03 – Pendant L

B PENDANT CLUSTERS

- 04 – 3 Strings
- 05 – 5 Strings

- 06 – 1 String
- 07 – 3 Strings
- 08 – 5 Strings
- 09 – 7 Strings

A

01




02




03

**B**

04

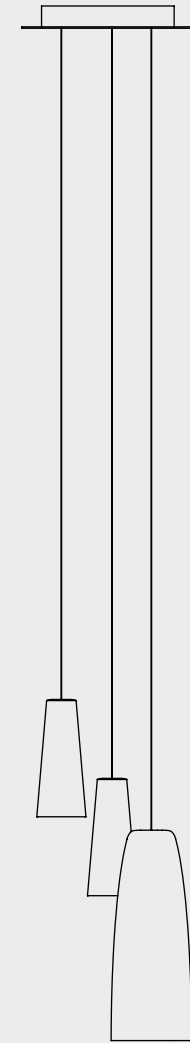


05

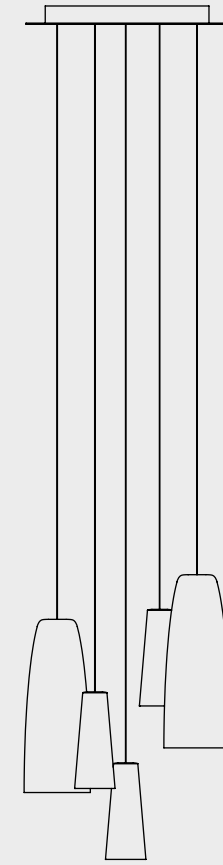**C**


06




07

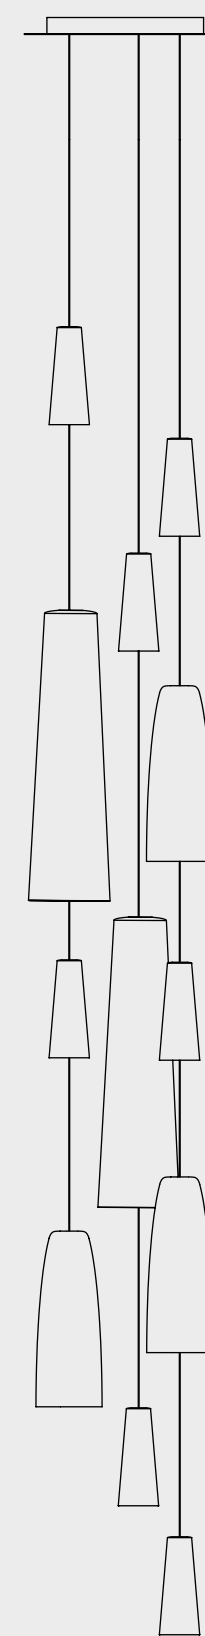

08

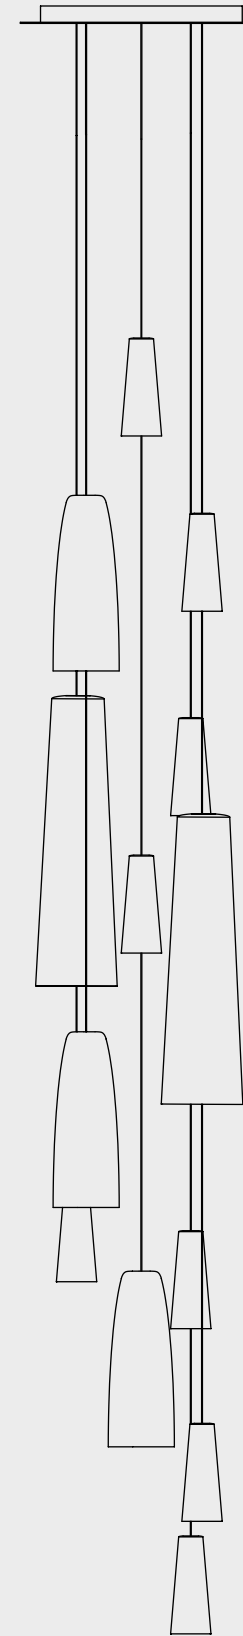

09

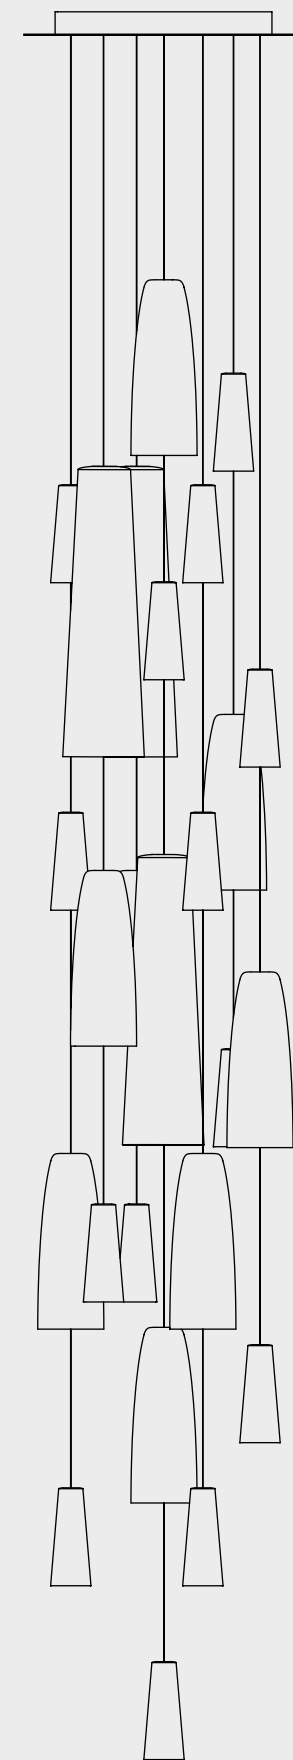





Stream

Single Pendant S

GENERAL

Product type	:	LED pendant luminaire
Application	:	Indoor
Mounting type	:	Surface-mounted (ceiling)
Protection class	:	Class I
IP rating	:	IP20
Color / surface finish	:	Powder Coated White
Material	:	Ceramic (lampshade)

ELECTRICAL

Rated voltage	:	220–230 Vac
Power consumption	:	9 W
Driver	:	Included in canopy
Dimmable	:	Yes
Dimming method	:	DALI (Phase - cut/Triac & Casmbi on request)
Energy efficiency	:	D

Finishes Available:

- Velvet
- Pulse Horizontal, Small Stripes
- Ombré

LIGHTING

Light source	:	Integrated LED (replaceable)
Luminous flux	:	720 lm
Luminous efficacy	:	80 lm/W
Color temperature	:	3000 K
CRI	:	90
Beam angle	:	wide flood
Light distribution	:	Diffuse
Lifetime	:	L70/B50 @ 50,000 h

MECHANICAL

Dimensions (Ø × H)	:	Ø100 × 240 mm
Weight	:	1.0 kg
Adjustability	:	Tiltable, height adjustable

STANDARDS

Certifications	:	CE, RoHS
----------------	---	----------





Finishes Available:

- Velvet
- Pulse Horizontal, Small Stripes
- Ombré


Stream

Single Pendant M

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 1120 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø140 × 370 mm
Power consumption	: 14 W	Weight	: 2.3 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D	STANDARDS	
		Certifications	: CE, RoHS



M



Finishes Available:

- Velvet
- Pulse Horizontal, Small Stripes
- Ombré

Stream


Single Pendant L

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 1680 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø200 × 690 mm
Power consumption	: 21 W	Weight	: 4.4 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D	STANDARDS	
		Certifications	: CE, RoHS



L





Finishes Available:


- Velvet
- Pulse Horizontal, Small Stripes
- Ombré

Stream Pendant Cluster 3

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 2240 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø350 × 780 mm
Power consumption	: 28 W	Weight	: 5 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



Velvet

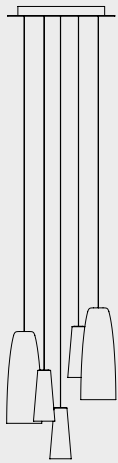

Finishes Available:

- Velvet
- Pulse Horizontal, Small Stripes
- Ombré


Stream Pendant Cluster 5

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 3600 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 V	Dimensions (Ø × H)	: Ø500 × 1000 mm
Power consumption	: 45 W	Weight	: 10.5 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



Velvet





Finishes Available:

- Velvet
- Pulse Horizontal, Small Stripes
- Ombré


Stream

Cascade Cluster 1

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 2960 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø230 × 3290 mm
Power consumption	: 37 W	Weight	: 10.5 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



Velvet




Stream Cascade Cluster 3

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 6240 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø380 × 3080 mm
Power consumption	: 78 W	Weight	: 18 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D		
		STANDARDS	
		Certifications	: CE, RoHS

- Finishes Available:
- Velvet
 - Pulse Horizontal, Small Stripes
 - Ombré



Velvet

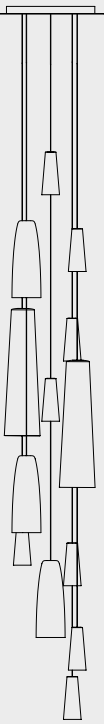


Stream Cascade Cluster 5

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 9600 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø560 × 3000 mm
Power consumption	: 120 W	Weight	: 25 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

- Finishes Available:
- Velvet
 - Pulse Horizontal, Small Stripes
 - Ombré



Velvet

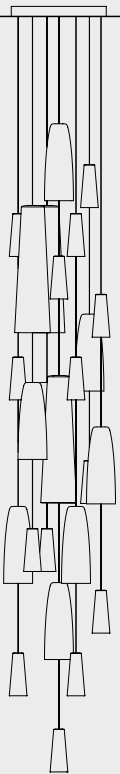

Stream Cascade Cluster 7

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 12,320 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Colour temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: wide flood
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø650 × 3570 mm
Power consumption	: 154 W	Weight	: 30 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS

- Finishes Available:
- Velvet
 - Pulse Horizontal, Small Stripes
 - Ombré



Velvet

Stream

– Material/
Finish



Finish:
Velvet



Finish:
Pulse Horizontal, Small Stripes



Finish:
Ombré

03

Burgeon

Burgeon embodies Stefanie Hering's aspiration to merge sculptural design with functional elegance. Crafted from delicate bisque porcelain, the light family takes its inspiration from classic porcelain figurines, showcasing intricate details and exceptional craftsmanship. Its distinctive bud-shaped design is a technical masterpiece, drawing on over 30 years of Hering's experience.

Available as table lamps, pendants and wall mounts, Burgeon adds a touch of refined cosiness to any space, casting warm, soft light throughout.



Burgeon

– Setup

A TABLE LAMPS**C** WALL

01 – Portable

06 – Wall


B PENDANTS

02 – 1 String


03 – 3 Strings

04 – 5 Strings


05 – 7 Strings

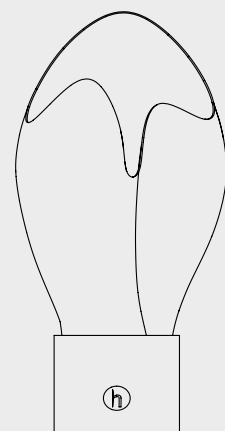A 01**B** 02



03

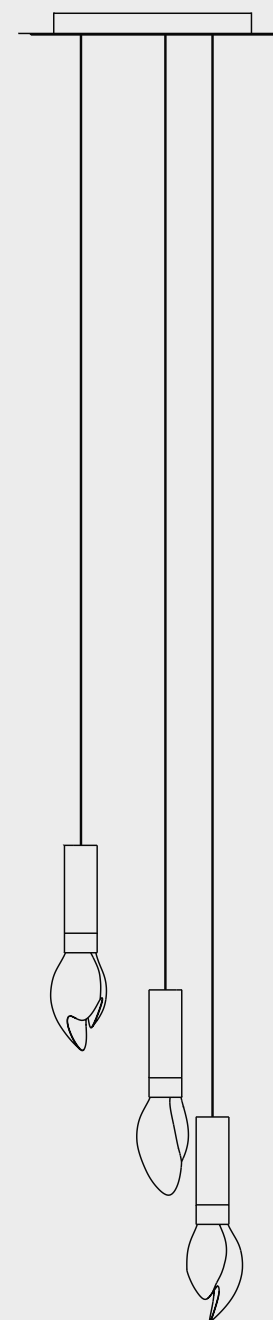

04

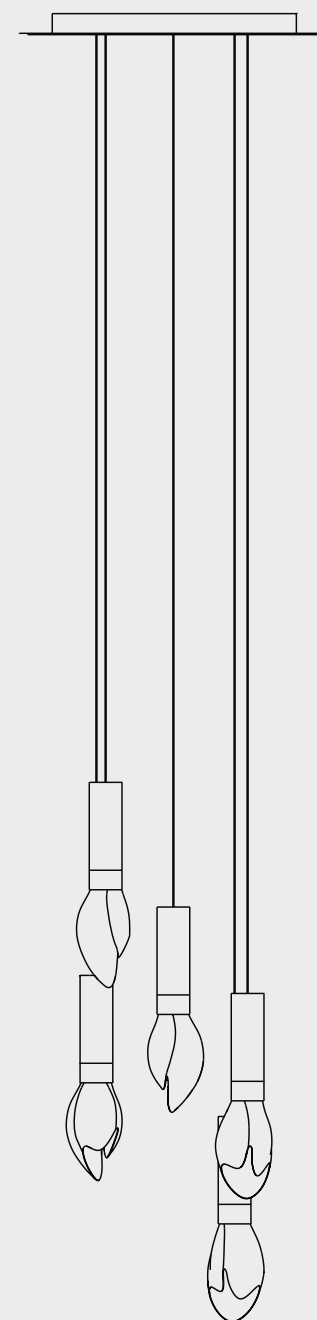

05

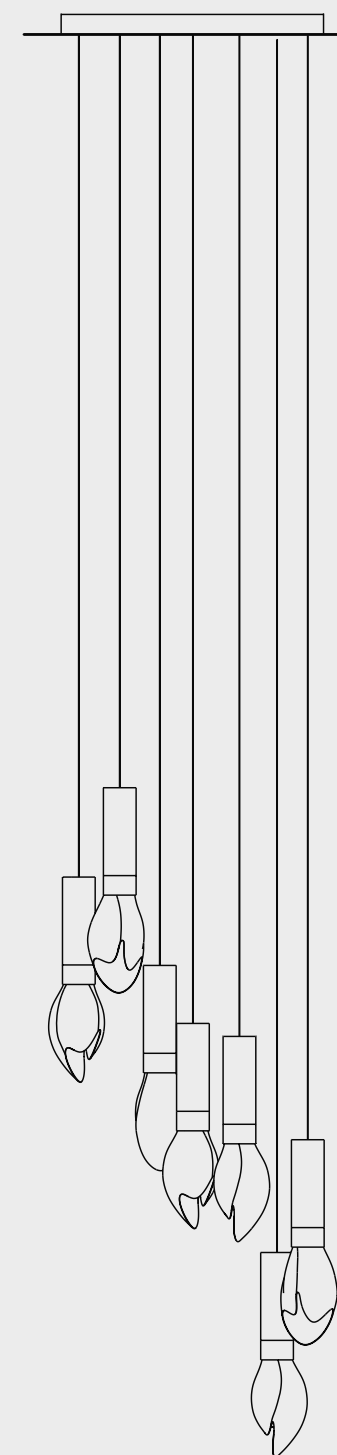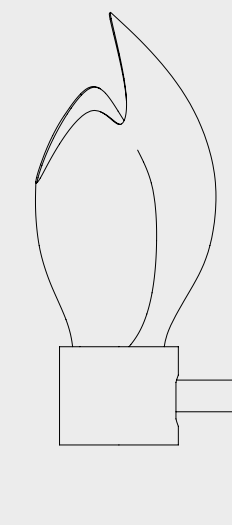**C** 06

Burgeon Table Lamps





Burgeon Portable

Base Finishes Available:

- Brushed Nickel
- Brushed Gunmetal
- Brushed Brass
- Powdercoated White

GENERAL		LIGHTING	
Product type	: Portable LED table luminaire	Light source	: Integrated LED
Application	: Indoor	Luminous flux	: 240 lm
Mounting type	: Portable	Luminous efficacy	: 80 lm/W
Protection class	: Class III	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Light distribution	: Diffuse
Material	: Ceramic (lampshade)	Lifetime	: L70/B50 @ 50,000 h
Charging	: USB - C Charging Plate + USB - C Cable		
ELECTRICAL		MECHANICAL	
Rated voltage	: 5 Vac	Dimensions (Ø × H)	: Ø120 × 280 mm
Power consumption	: 3 W	Weight	: 1.2 kg
Driver	: Not applicable	Adjustability	: Portable
Dimmable	: Yes		
Dimming method	: Build-in touch dimmer		
Energy efficiency	: D		
		STANDARDS	
		Certifications	: CE, RoHS



Burgeon
Portable

– Material/
Finish



Base Material:
Brushed Nickel



Base Finish:
Brushed Gunmetal



Base Finish:
Brushed Brass



Base Finish:
Powdercoated White

Burgeon Pendants







Base Finishes Available:

- Brushed Nickel
- Brushed Nickel/White Marble
- Brushed Gunmetal
- Brushed Gunmetal/Black Marble
- Brushed Brass
- Brushed Brass/Green Marble
- Powdercoated White


Burgeon

Single Pendant

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 560 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Light distribution	: Diffuse
Material	: Ceramic (lampshade)	Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø120 × 440 mm
Power consumption	: 8 W	Weight	: 1.5 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes	STANDARDS	Certifications : CE, RoHS
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D		



Brushed Nickel

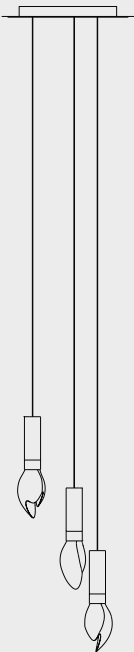

Burgeon Pendant Cluster 3


GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 1920 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Light distribution	: Diffuse
Material	: Ceramic (lampshade)	Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø390 × 980 mm
Power consumption	: 24 W	Weight	: 2.7 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes	STANDARDS	
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D		
		Certifications	: CE, RoHS

Base Finishes Available:

- Brushed Nickel
- Brushed Nickel/White Marble
- Brushed Gunmetal
- Brushed Gunmetal/Black Marble
- Brushed Brass
- Brushed Brass/Green Marble
- Powdercoated White



Brushed Nickel

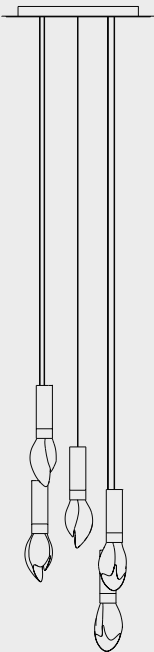


Burgeon Pendant Cluster 5

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 3200 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Light distribution	: Diffuse
Material	: Ceramic (lampshade)	Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø500 × 1100 mm
Power consumption	: 40 W	Weight	: 4.8 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes	STANDARDS	Certifications : CE, RoHS
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D		

- Base Finishes Available:
- Brushed Nickel
 - Brushed Nickel/White Marble
 - Brushed Gunmetal
 - Brushed Gunmetal/Black Marble
 - Brushed Brass
 - Brushed Brass/Green Marble
 - Powdercoated White



Brushed Nickel

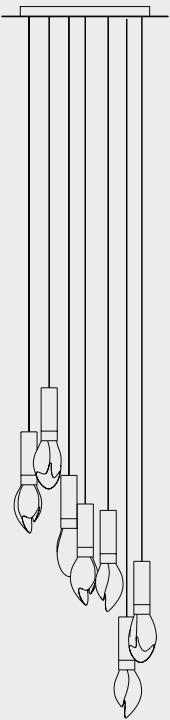

Burgeon Pendant Cluster 7

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 4320 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Nickel	Light distribution	: Diffuse
Material	: Ceramic (lampshade)	Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (Ø × H)	: Ø600 × 1370 mm
Power consumption	: 54 W	Weight	: 6.5 kg
Driver	: Included in canopy	Adjustability	: Tilttable, height adjustable
Dimmable	: Yes	STANDARDS	Certifications : CE, RoHS
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D		

Base Finishes Available:

- Brushed Nickel
- Brushed Nickel/White Marble
- Brushed Gunmetal
- Brushed Gunmetal/Black Marble
- Brushed Brass
- Brushed Brass/Green Marble
- Powdercoated White



Brushed Nickel

Burgeon
Pendants

– Material/
Finish




Porcelain: Bisque Porcelain	Porcelain: Bisque Porcelain	Porcelain: Bisque Porcelain	Porcelain: Bisque Porcelain	Porcelain: Bisque Porcelain	Porcelain: Bisque Porcelain	Porcelain: Bisque Porcelain
Base: Brushed Nickel	Base: Brushed Nickel White Marble	Base: Brushed Gunmetal	Base: Brushed Gunmetal Black Marble	Base: Brushed Brass	Base: Brushed Brass Green Marble	Base: Powdercoated White, RAL 9003

Burgeon Wall





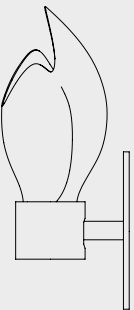

Burgeon Wall

GENERAL

Product type	:	LED wall luminaire
Application	:	Indoor
Mounting type	:	Surface-mounted (wall)
Protection class	:	Class I
IP rating	:	IP20
Color / surface finish	:	Powder Coated White
Material	:	Ceramic (lampshade)

ELECTRICAL

Rated voltage	:	220–230 Vac
Power consumption	:	6 W
Driver	:	Included in canopy
Dimmable	:	Yes
Dimming method	:	DALI (Phase - cut/Triac & Casmbi on request)
Energy efficiency	:	D

LIGHTING

Light source	:	Integrated LED (replaceable)
Luminous flux	:	480 lm
Luminous efficacy	:	80 lm/W
Color temperature	:	3000 K
CRI	:	90
Light distribution	:	Diffuse
Lifetime	:	L70/B50 @ 50,000 h

MECHANICAL

Dimensions (L × W × H)	:	150 × 140 × 330 mm
Weight	:	2.8 kg
Adjustability	:	Swivel, height adjustable

STANDARDS

Certifications	:	CE, RoHS
----------------	---	----------

Base Finishes Available:

- Brushed Nickel
- Powdercoated White



04

Tropo

The Tropo-family consists of tubular shapes in different sizes with a curved triangle base, changing their appearance depending on your viewing angle. This dynamic design ensures that during the daytime, the porcelain lampshades create sculptural room settings, and at night, the translucent, velvety bisque porcelain emits a warm and inviting glow. For the chandeliers, a light module enables three different light settings, combining spatial and directed illumination.

Available as chandeliers and wall mounts, Tropo creates adaptable lighting atmospheres tailored to each occasion.

The bisque porcelain shades can be customized with a wide range of finishes from Hering Berlin's portfolio—ideal for a bespoke lighting solution.



Tropo

– Setup

A CHANDELIERS


- 01 – Chandelier 5
- 02 – Chandelier 7

B WALL MOUNTS


- 03 – Wall

A


01

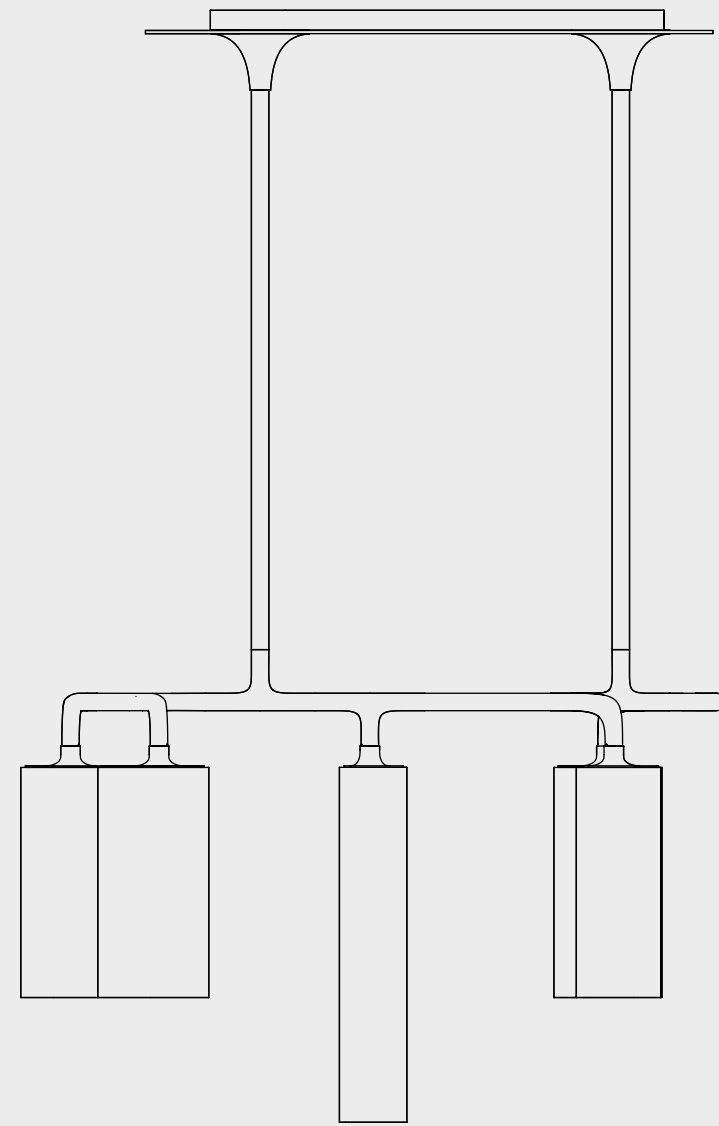


02

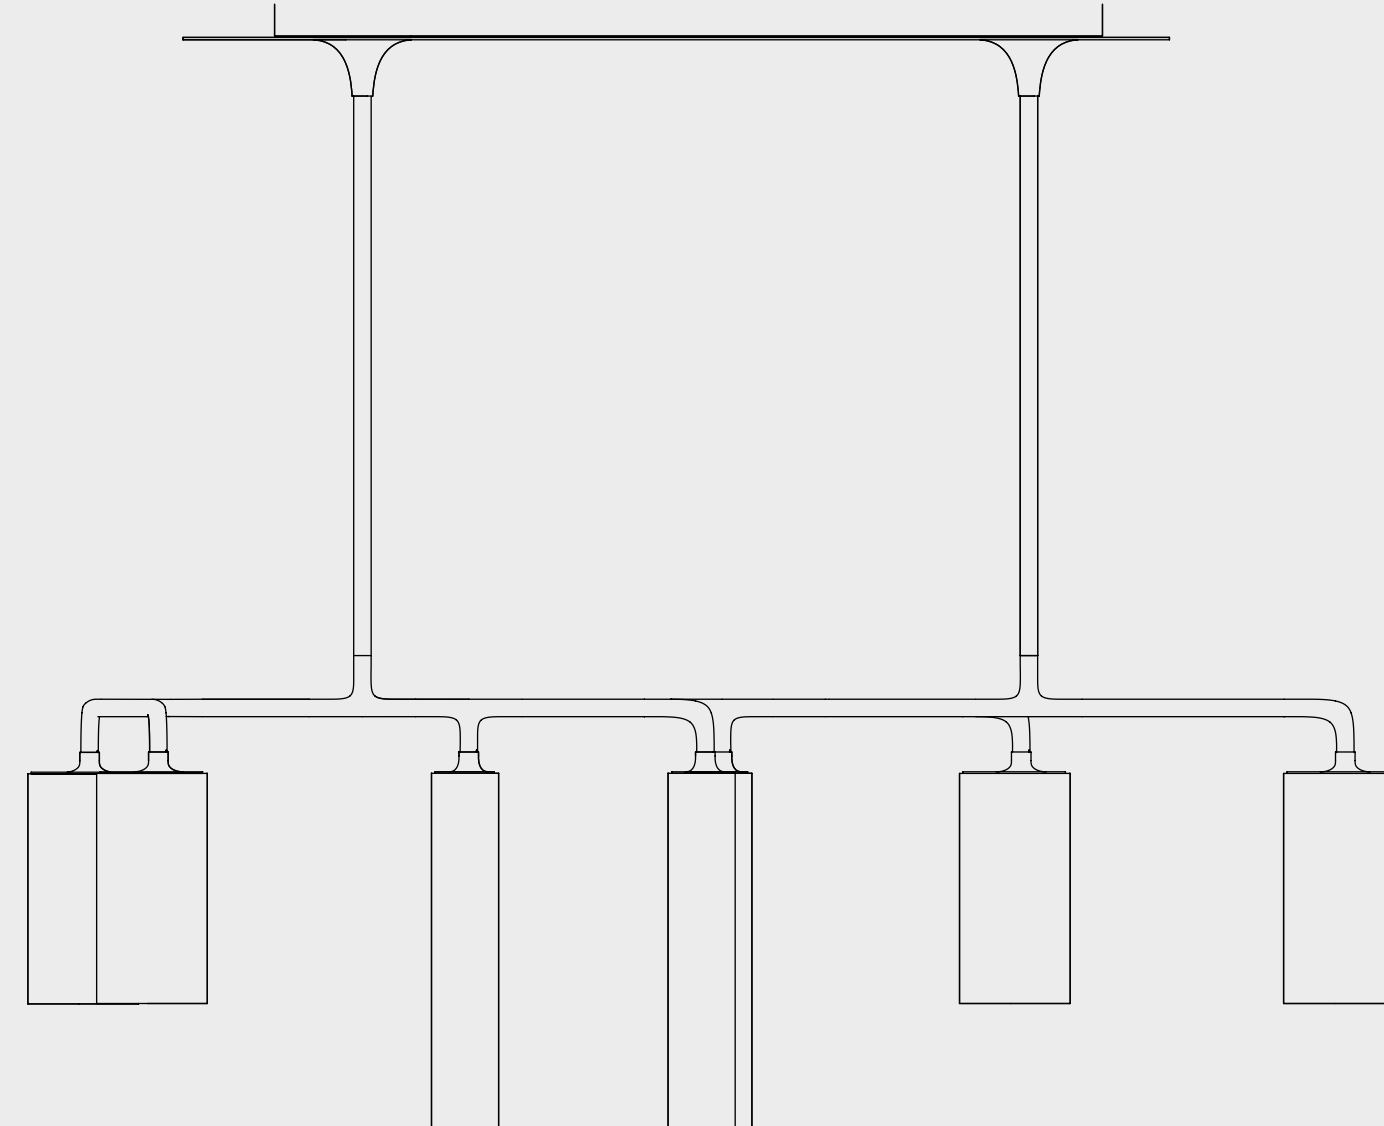**B**

03

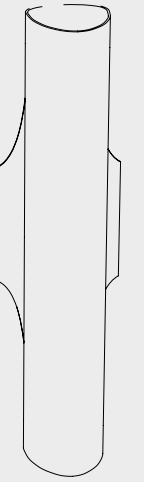



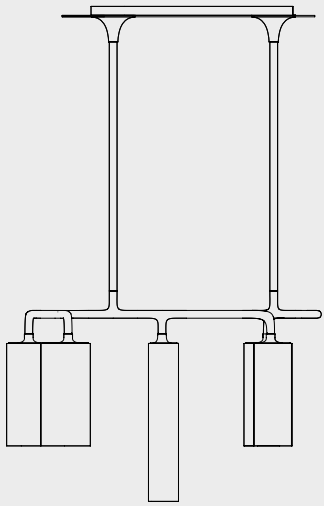

Porcelain Finishes Available:

- Velvet
- Ombré


Frame Finishes Available:

- Powdercoated White
- Brushed Brass

Tropo Chandelier 5

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 4240 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 120°
Material	: Ceramic (lampshade)	Light distribution	: Diffuse (Ambient light and Spotlight can be controlled separatly)
ELECTRICAL		Lifetime	: L70/B50 @ 50,000 h
Rated voltage	: 220–230 Vac	MECHANICAL	
Power consumption	: 53 W	Dimensions (L × W × H)	: 860 × 625 × 515 mm
Driver	: Included in canopy	Weight	: 16.5 kg
Dimmable	: Yes	Adjustability	: Tilttable, height adjustable
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



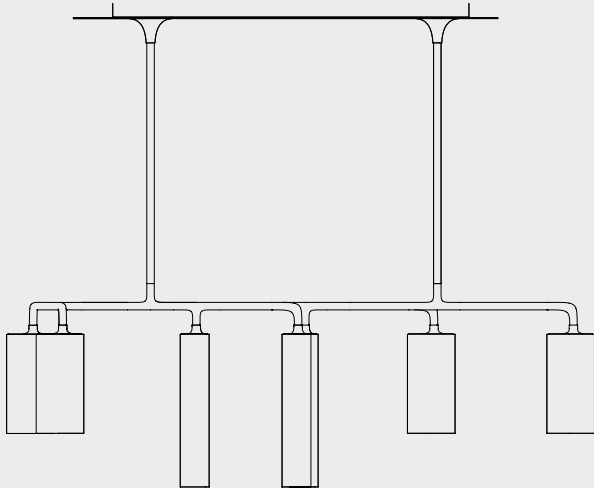

Porcelain Finishes Available:

- Velvet
- Ombré

Frame Finishes Available:

- Powdercoated White
- Brushed Brass

Tropo Chandelier 7

GENERAL		LIGHTING	
Product type	: LED pendant luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 6320 lm
Mounting type	: Surface-mounted (ceiling)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Powder Coated White	Beam angle	: 120°
Material	: Ceramic (lampshade)	Light distribution	: Diffuse (Ambient light and Spotlight can be controlled separatly)
ELECTRICAL		Lifetime	: L70/B50 @ 50,000 h
Rated voltage	: 220–230 Vac	MECHANICAL	
Power consumption	: 79 W	Dimensions (L × W × H)	: 1680 × 590 × 515 mm
Driver	: Included in canopy	Weight	: 26.4 kg
Dimmable	: Yes	Adjustability	: Tilttable, height adjustable
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)	STANDARDS	
Energy efficiency	: D	Certifications	: CE, RoHS



Tropo
Chandeliers

– Material/
Finish



Porcelain Finish:
Velvet

Frame Finish:
Powdercoated White



Porcelain Finish:
Ombré

Frame Finish:
Powdercoated White




Porcelain Finish:
Velvet

Frame Finish:
Brushed Brass



Porcelain Finish:
Ombré

Frame Finish:
Brushed Brass



Tropo Wall

GENERAL		LIGHTING	
Product type	: LED wall luminaire	Light source	: Integrated LED (replaceable)
Application	: Indoor	Luminous flux	: 800 lm
Mounting type	: Surface-mounted (wall)	Luminous efficacy	: 80 lm/W
Protection class	: Class I	Color temperature	: 3000 K
IP rating	: IP20	CRI	: 90
Color / surface finish	: Brushed Brass	Beam angle	: 120°
Material	: Ceramic (lampshade)	Light distribution	: Diffuse
		Lifetime	: L70/B50 @ 50,000 h
ELECTRICAL		MECHANICAL	
Rated voltage	: 220–230 Vac	Dimensions (L × W × H)	: 90 × 105 × 440 mm
Power consumption	: 10 W	Weight	: 1.8 kg
Driver	: Included in canopy	Adjustability	: Tilttable
Dimmable	: Yes		
Dimming method	: DALI (Phase - cut/Triac & Casmbi on request)		
Energy efficiency	: D	STANDARDS	
		Certifications	: CE, RoHS

Porcelain Finishes Available:

- Velvet
- Pulse

Frame Finishes Available:

- Powdercoated White
- Brushed Brass



Velvet/Brushed Brass

Tropo Wall

– Material/ Finish



Porcelain Finish:
Velvet

Frame Finish:
Brushed Brass



Porcelain Finish:
Velvet

Frame Finish:
Powdercoated White



Porcelain Finish:
Pulse

Frame Finish:
Brushed Brass



Porcelain Finish:
Pulse

Frame Finish:
Powdercoated White

Contact

STENG-LV GmbH
Stuttgart, DE
P 0711- 327 51 92
info@steng-lv.de
www.steng-lv.de/hering-berlin

Ansprechpartner
Andreas Steng